


- Most compact 10 Watt converter in DIP-16 metal casing
- Highest power density of 3.83 W/cm³
- 6-side shielded metal case with insulated base plate
- Ultra wide 4:1 input voltage range
- High efficiency for low thermal loss
- Operating temperature range of -40°C to +88°C
- Built-in EN 55032 class A filter
- Protection against short circuit and overload
- 3-year product warranty

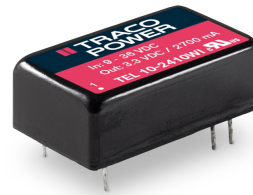

The TEL 10WI series is a range of isolated 10 Watt converters which come in an ultra compact DIP-16 metal package. The design purpose of these series was to miniaturize low power DC/DC converters to the maximum without sacrificing high efficiency. The TEL 10WI series sets the new standard for power density with 3.83 W/cm³.

The TEL 10WI series offer an ultra wide 4:1 input voltage range and feature a high efficiency of up to 86% which enables an operation temperature of up to +70°C at full load and up to 88°C with 50% load.

The converters have an internal input filter to comply with conducted emission EN 55032 class A. The TEL 10WI Series models are an economical solution for space critical and cost sensitive applications in instrumentation, IT and industrial electronics.

| Models | | | | | | | |
|---------------|-----------------------------|------------------------------|------------------|----------|------------------|-----------------|------|
| Order Code | Input Voltage Range | Output 1 | | Output 2 | | Efficiency typ. | |
| | | Vnom | I _{max} | Vnom | I _{max} | | |
| TEL 10-2410WI | 9 - 36 VDC (24 VDC nom.) | 3.3 VDC | 2'700 mA | | | 80 % | |
| TEL 10-2411WI | | 5.1 VDC | 2'000 mA | | | 83 % | |
| TEL 10-2412WI | | 12 VDC | 833 mA | | | 87 % | |
| TEL 10-2413WI | | 15 VDC | 666 mA | | | 88 % | |
| TEL 10-2415WI | | 24 VDC | 416 mA | | | 88 % | |
| TEL 10-2422WI | | +12 VDC | 416 mA | | -12 VDC | 416 mA | 87 % |
| TEL 10-2423WI | | +15 VDC | 333 mA | | -15 VDC | 333 mA | 87 % |
| TEL 10-4810WI | | 18 - 75 VDC (48 VDC nom.) | 3.3 VDC | 2'700 mA | | | 80 % |
| TEL 10-4811WI | 5.1 VDC | | 2'000 mA | | | 83 % | |
| TEL 10-4812WI | 12 VDC | | 833 mA | | | 87 % | |
| TEL 10-4813WI | 15 VDC | | 666 mA | | | 88 % | |
| TEL 10-4815WI | 24 VDC | | 416 mA | | | 88 % | |
| TEL 10-4822WI | +12 VDC | | 416 mA | | -12 VDC | 416 mA | 87 % |
| TEL 10-4823WI | +15 VDC | | 333 mA | | -15 VDC | 333 mA | 87 % |

Input Specifications

| | | |
|------------------------|----------------|---|
| Input Current | - At no load | 24 Vin models: 10 mA typ. 48 Vin models: 7 mA typ. |
| | - At full load | 24 Vin models: 480 mA max. 48 Vin models: 240 mA max. |
| Surge Voltage | | 24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.) |
| Under Voltage Lockout | | 24 Vin models: 7 VDC min. / 8 VDC typ. 48 Vin models: 15 VDC min. / 16 VDC typ. |
| Recommended Input Fuse | | 24 Vin models: 2'000 mA (slow blow) 48 Vin models: 1'000 mA (slow blow) (The need of an external fuse has to be assessed in the final application.) |
| Input Filter | | Internal Pi-Type |

Output Specifications

| | | |
|--|--|--|
| Voltage Set Accuracy | | ±1% max. |
| Regulation | - Input Variation (Vmin - Vmax) | single output models: 0.8% max. dual output models: 0.8% max. |
| | - Load Variation (0 - 100%) | single output models: 1% max. dual output models: 2% max. (Output 1) 2% max. (Output 2) |
| | - Cross Regulation (25% / 100% asym. load) | dual output models: 5% max. |
| | | |
| Ripple and Noise (20 MHz Bandwidth) | - single output | 3.3 Vout models: 60 mVp-p typ. |
| | | 5.1 Vout models: 60 mVp-p typ. |
| | | 12 Vout models: 80 mVp-p typ. |
| | | 15 Vout models: 80 mVp-p typ. |
| | | 24 Vout models: 80 mVp-p typ. |
| | - dual output | 12 / -12 Vout models: 80 / 80 mVp-p typ. |
| | | 15 / -15 Vout models: 80 / 80 mVp-p typ. |
| | - single output | 3.3 Vout models: 75 mVp-p max. |
| | | 5.1 Vout models: 75 mVp-p max. |
| | | 12 Vout models: 100 mVp-p max. |
| 15 Vout models: 100 mVp-p max. | | |
| 24 Vout models: 100 mVp-p max. | | |
| - dual output | 12 / -12 Vout models: 100 / 100 mVp-p max. 15 / -15 Vout models: 100 / 100 mVp-p max. | |
| Capacitive Load | - single output | 3.3 Vout models: 2'600 µF max. |
| | | 5.1 Vout models: 1'300 µF max. |
| | | 12 Vout models: 560 µF max. |
| | | 15 Vout models: 560 µF max. |
| | - dual output | 24 Vout models: 200 µF max. |
| | | 12 / -12 Vout models: 390 / 390 µF max. 15 / -15 Vout models: 200 / 200 µF max. |
| Minimum Load | | Not required |
| Temperature Coefficient | | ±0.02 %/K max. |
| Start-up Time | | 30 ms typ. / 60 ms max. |
| Short Circuit Protection | | Continuous, Automatic recovery |
| Output Current Limitation | | 195% max. of Iout max. |
| | | 160% typ. of Iout max. |
| Transient Response | - Response Deviation | 5% max. (25% Load Step) |
| | - Response Time | 500 µs max. (25% Load Step) |

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Safety Specifications

| | | |
|------------------|-----------------------------|--|
| Safety Standards | - IT / Multimedia Equipment | EN 62368-1 IEC 62368-1 UL 62368-1 |
| | - Certification Documents | www.tracopower.com/overview/tel10wi |
| Pollution Degree | | PD 3 |

EMC Specifications

| | | |
|---------------|-----------------------------|---|
| EMI Emissions | - Conducted Emissions | EN 55032 class A (internal filter) EN 55032 class B (with external filter) FCC Part 15 class A (internal filter) |
| | - Radiated Emissions | EN 55032 class A (with external filter) EN 55032 class B (with external filter) |
| | External filter proposal: | www.tracopower.com/overview/tel10wi |
| EMS Immunity | | EN 55024 (IT Equipment) |
| | - Electrostatic Discharge | Air: EN 61000-4-2, ± 8 kV, perf. criteria A Contact: EN 61000-4-2, ± 6 kV, perf. criteria A |
| | - RF Electromagnetic Field | EN 61000-4-3, 20 V/m, perf. criteria A |
| | - EFT (Burst) / Surge | EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 2 kV, perf. criteria A |
| | - Conducted RF Disturbances | External filter proposal: www.tracopower.com/overview/tel10wi EN 61000-4-6, 10 Vrms, perf. criteria A |
| | - PF Magnetic Field | Continuous: EN 61000-4-8, 100 A/m, perf. criteria A |

General Specifications

| | | |
|--------------------------|---------------------------------|---|
| Relative Humidity | | 95% max. (non condensing) |
| Temperature Ranges | - Operating Temperature | -40°C to +88°C |
| | - Case Temperature | +105°C max. |
| | - Storage Temperature | -50°C to +125°C |
| Power Derating | - High Temperature | See application note: www.tracopower.com/overview/tel10wi |
| Cooling System | | Natural convection (20 LFM) |
| Switching Frequency | | 355 - 485 kHz (PWM) |
| | | 420 kHz typ. (PWM) |
| Insulation System | | Functional Insulation |
| Isolation Test Voltage | - Input to Output, 60 s | 1'500 VDC |
| | - Input to Output, 1 s | 1'800 VDC |
| | - Input to Case, 60 s | 1'000 VDC |
| | - Output to Case, 60 s | 1'000 VDC |
| Isolation Resistance | - Input to Output, 500 VDC | 1'000 M Ω min. |
| Isolation Capacitance | - Input to Output, 100 kHz, 1 V | 1'500 pF max. |
| Reliability | - Calculated MTBF | 2'540'000 h (MIL-HDBK-217F, ground benign) |
| Housing Material | | Alu alloy, black anodized coating |
| Potting Material | | Epoxy (UL 94 V-0 rated) |
| Pin Material | | Copper Alloy (C6801) |
| Pin Foundation Plating | | Nickel (2 - 4 μ m) |
| Pin Surface Plating | | Tin (3 - 5 μ m), matte |
| Soldering Profile | | Wave Soldering |
| | | 260°C / 10 s max. |
| Connection Type | | THD (Through-Hole Device) |
| Weight | | 6.5 g |
| Environmental Compliance | - REACH Declaration | www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant |
| | - RoHS Declaration | www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a |


All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Supporting Documents

Overview Link (for additional Documents)


www.tracopower.com/overview/tel10wi

Outline Dimensions

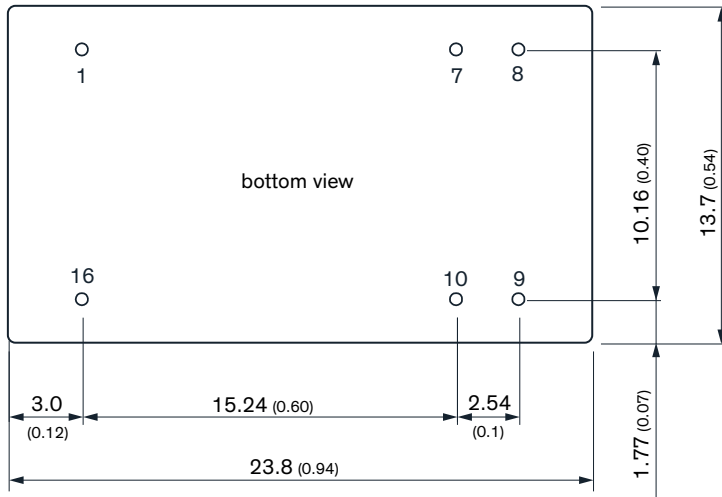

| Pinout | | |
|--------|------------|------------|
| Pin | Single | Dual |
| 1 | -Vin (GND) | -Vin (GND) |
| 7 | NC | NC |
| 8 | NC | Common |
| 9 | +Vout | +Vout |
| 10 | -Vout | -Vout |
| 16 | +Vin (Vcc) | +Vin (Vcc) |

NC: Not connected

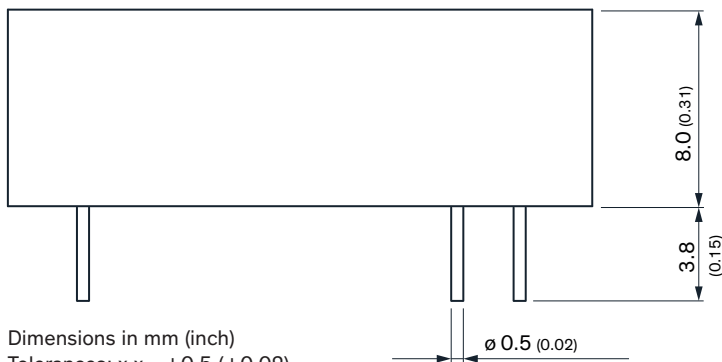

Dimensions in mm (inch)
 Tolerances: x.x ±0.5 (±0.02)
 x.xx ±0.25 (±0.01)
 Pin diameter 0.5±0.05 (0.02 ±0.002)